

CT12-100X 12V 100Ah(10hr)

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.




Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Case and cover available in both standard and flame retardant ABS.

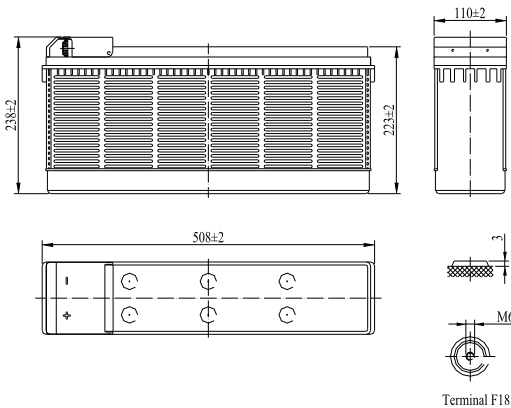

Performance Characteristics









Battery model	CT12-100X			
Nominal voltage	12V			
Number of cell	6			
Capacity (20°C)	10hR(10 A, 10.8V)	5hR(18.1A, 10.5V)		1hR(70.4A, 9.60V)
	100Ah	90.5Ah		70.4Ah
Dimensions Max.	Length	Width	Height	Total Height
	508±2 mm	110±2 mm	223±2 mm	238±2 mm
Approx. weight	32.0Kg (70.5 lbs)			
Internal resistance	Full charged at 20°C: 6.3mOhms			
Self discharge	3% of capacity declined per month at 20°C (average)			
Operating temperature range	Discharge	Charge	Storage	
	-20~60°C	-10~60°C	-20~60°C	
Max. discharge current (20°C)	900A (5s)			
Short circuit current	1700A			

Discharge Constant Current (Amperes at 68°F20°C)

End Point Volts/Cell	10min	15min	30min	45min	1h	3h	5h	10h
1.60V	218	176	115	78.8	62.5	27.8	18.5	10.1
1.65V	201	165	111	76.4	60.5	27.1	18.4	10.1
1.70V	185	154	107	73.9	58.5	26.4	18.3	10.0
1.75V	169	143	102	71.6	56.5	25.7	18.1	10.0
1.80V	153	132	98	68	54.1	24.6	18.0	10.0

Discharge Constant Power (Watts at 68°F20°C)

End Point Volts/Cell	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	380	319	223	145	116	66.9	52.3	36.5
1.65V	358	303	214	141	113	65.4	51.2	36.1
1.70V	337	286	205	138	110	63.8	50.1	35.8
1.75V	316	270	196	134	107	62.2	49.1	35.5
1.80V	294	254	187	128	103	59.9	47.3	34.6

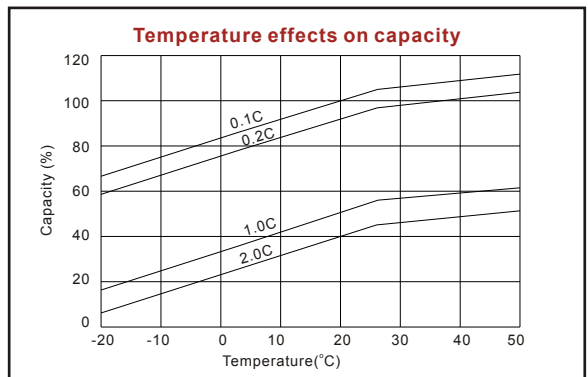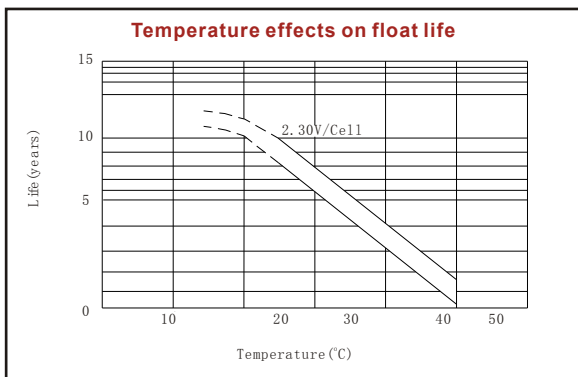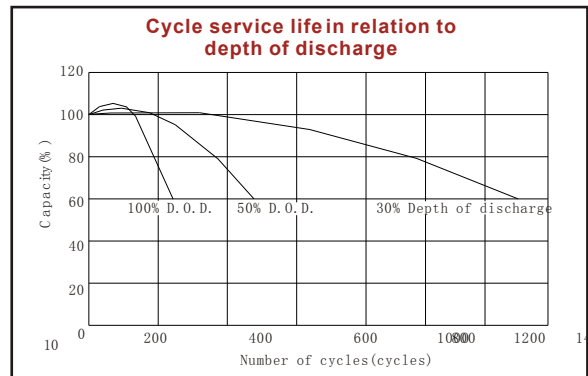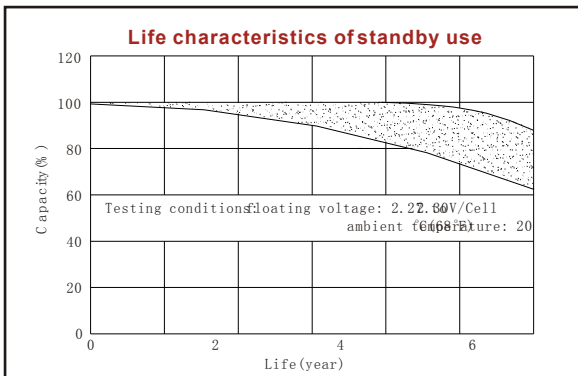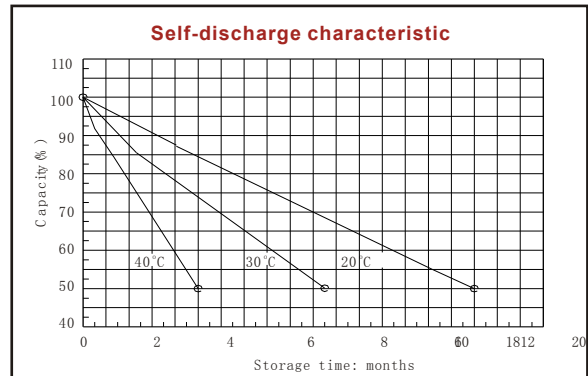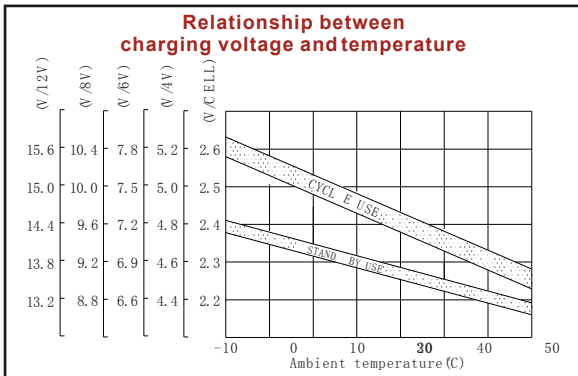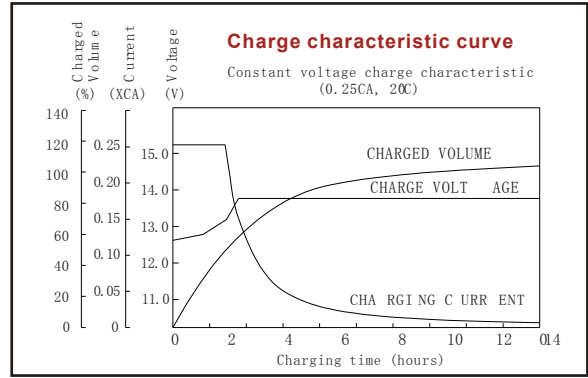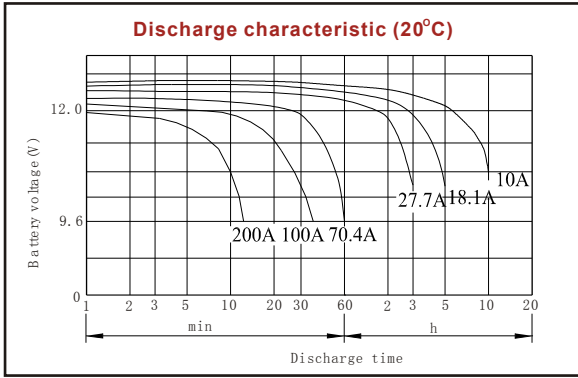

ISO9001:2000

MH25860

CE EMC tested
GEM19906-9202-E-16

Shenzhen Center Power Tech. Co., Ltd.
 Center Power Industrial Park Kongfu Industrial District Dapeng Town 518120 Shenzhen, China
 Tel: (+86-755) 8431 8088 Fax: (+86-755) 8431 8038 E-mail: sales@vision-batt.com

www.vision-batt.com